




Commercial
Performance
Coatings

2K BINDER

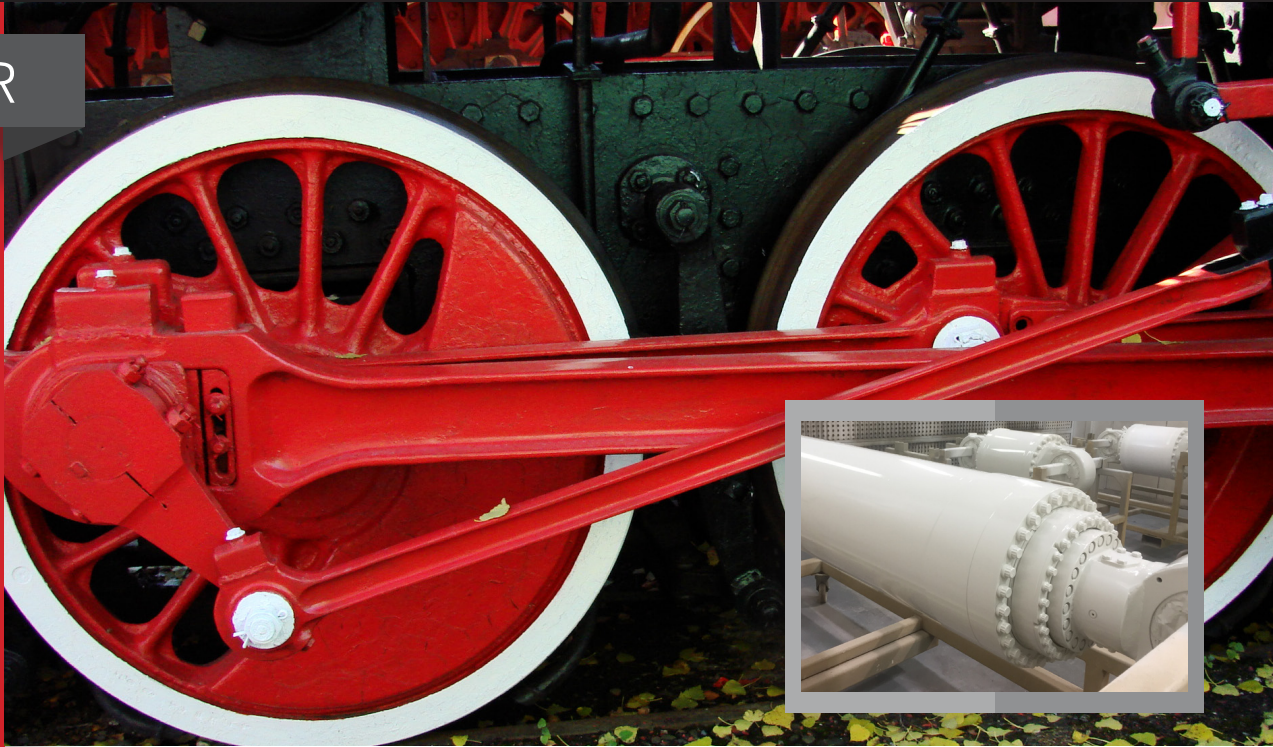

2K DIRECT TO METAL

When strong durability, high productivity and excellent final appearance are key factors, 2K Direct To Metal has all the bases covered. Designed for application efficiency, this two-component polyurethane product contains robust anti-corrosive pigmentation properties and is formulated to provide strong adhesion when applied directly to clean, bare metal substrates, including steel, tinplate, iron and stainless steel (blasting recommended), as well as glass fibre reinforced plastics. In particular, it offers the ability to be applied at high film thicknesses (up to 160µm wet film) and produces a high gloss end finish.

Colour is another market leading feature. By utilising the SELEMIX® universal tinter system, 2K Direct To Metal can be mixed in almost 10,000 different colours, including the AS2700 and RAL colour ranges, as well as a variety of gloss levels. There is plenty of application flexibility, too. As well as 'Normal' hardener, a 'Fast' hardener option gives operators an excellent solution for situations where fast drying is important. And, a choice of four reducers – cold (Fast), normal (Normal), hot (Slow) and very hot (Extra Slow) – makes it easy to effectively deal with a wide range of application conditions or for larger jobs.



www.ppgcpc.com.au